

PRODUCT DATASHEET

Confidex Steelwave Micro II™



Small-sized asset tag with versatile attachment options and unparalleled performance.

ELECTRICAL SPECIFICATION

Device type

RAIN RFID / EPCglobal Gen2v2

Operational frequency

Global 865-928 MHz

IC options and memory configurations

Impinj M780™

- EPC 496 bit; User 128 bit; TID 96 bit
Impinj Monza 4QT™
- EPC 128 bit; User 512 bit; TID 96 bit
Impinj Monza 4E™
- EPC 496 bit; User 128 bit; TID 96 bit

EPC memory content

Unique number encoded as a default

Read range (2W ERP)*

M780:

- On metal up to 7 m / 23 ft
- Off metal up to 2 m / 7 ft

M4E / M4QT

- On metal up to 4 m / 13 ft
- Off metal up to 1 m / 3 ft


Applicable surface materials*

Works on any material


* Read ranges are theoretical values that are calculated for non-reflective environment, in where antennas with optimum directivity are used with maximum allowed operating power according to ETSI EN 302 208 (2W ERP). Different surface materials may have an effect on performance.

RADIATION PATTERNS

Freeair

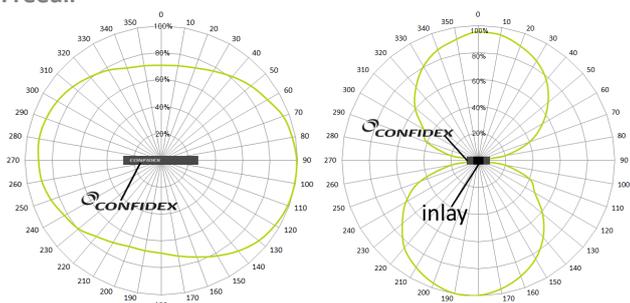

On metal

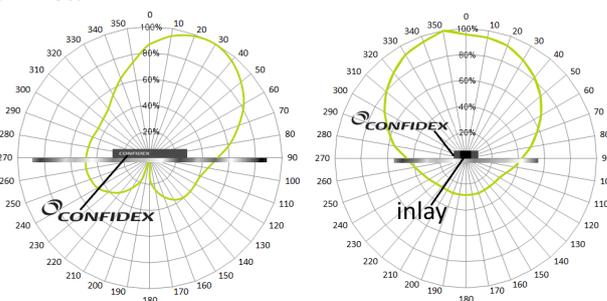

MECHANICAL SPECIFICATION

Tag materials

Engineering plastics and synthetic face layer

Background adhesive

High performance acrylic adhesive

Weight

2 g

Delivery format


Single

Amount in box

1000pcs

Dimensions

38 x 13 x 4,5 mm / 1.5 x 0.5 x 0.17 in

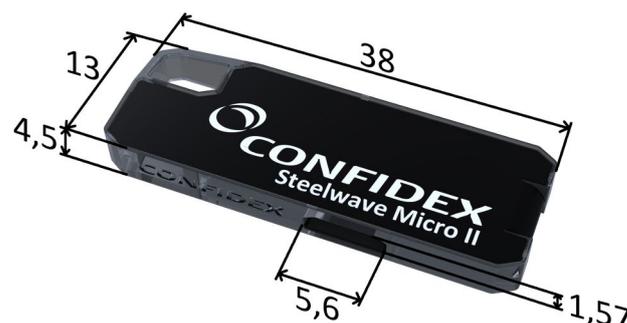

ENVIRONMENTAL RESISTANCE

Operating temperature

-20°C to +70°C / -4°F to +158°F

Ambient temperature

-20°C to +70°C / -4°F to +158°F

IP classification

IP67

Chemical resistance

No physical or performance changes in:

- 2 hour Salt water exposure (salinity 10%)
- 2 hour Motor oil exposure

Additionally, short time exposure resistant against sulfuric acid. Acetone and sodium hydroxide should be avoided.

Expected lifetime

Years in normal operating conditions

Values in the table are the best recommendations; resistance against environmental conditions depends on the combination of all influencing factors, exposure duration and chemical concentrations. Thus, product's final suitability for certain environmental conditions is recommended to be tested. Contact Confidex for more specific information.

PERSONALIZATION OPTIONS

Pre-encoding

- Customer specific encoding of EPC or user memory. Locking permanently or with password.

Customized data label

- Customer specific layout including logo, text, numbers, barcodes etc.

INSTALLATION INSTRUCTIONS

Steelwave Micro II can be attached with several fixing methods:

- High performance acrylic adhesive (included)
- Hanging with tethering string
- Cable tie through the tag

To achieve the optimal performance in metal applications please leave metal on the tag's left side like shown in image below. Ideally the tag is placed on large even metal surface with direct metal contact underneath the whole tag.



Metal on the left side of tag

When mounting the tag with its adhesive background, clean and dry the surface for obtaining the maximum bond strength.

Ideal application temperature is from +21°C to +38°C (+70°F to +100°F), bond strength can be improved with firm application pressure and moderate heating from +38°C to +54°C (+100°F to +130°F).

Installation at temperatures below 10°C (50°F) is not recommended.

ORDER INFORMATION

Product number: 3004227

Product name: Confidex Steelwave Micro II™ M780

Product number: 3000587

Product name: Confidex Steelwave Micro II™ M4QT

Following product is available upon special request:

Product number: 3000619

Product name: Confidex Steelwave Micro II™ M4E

For other versions, additional information and technical support contact Confidex Ltd.

DISCLAIMER

THE MATERIALS, PRODUCTS AND SERVICES ARE SOLD SUBJECT TO ITS STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, CONFIDEX MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN CONFIDEX STANDARD CONDITIONS OF SALE, CONFIDEX AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Confidex products, materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished systems incorporating Confidex products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Confidex.